

Standard 6.1 Cubic Foot Refrigerator


Standard Refrigerator

The optional refrigerator is durable and corrosion resistant. Capable of maintaining samples at the EPA-recommended 0–4° C, even in high ambient temperatures, this industrial-grade refrigerator is built to handle the toughest environments. Features such as a corrosion-resistant frame and exterior, refrigerant lines wrapped with asphalt cork tape to resist damaging environments, non-ferrous evaporation coils with corrosion resistant finish, and a heavy-duty compressor enable reliable operation under the harshest conditions. The standard refrigerator is available in your choice of white baked enamel or stainless steel exterior and in 115V or 230V.

Full One-year Warranty

When this refrigerator is operated and maintained in accordance with the operating manual provided, Manning will repair or replace, free of charge, any defective materials or workmanship for one year from the date of shipment. Repair or replacement under warranty is at our discretion and does not extend the warranty past one-year from the original date of shipment.

This warranty applies only while this product is operated in the United States. This warranty gives you specific rights; you may also have other rights, which vary from state to state.

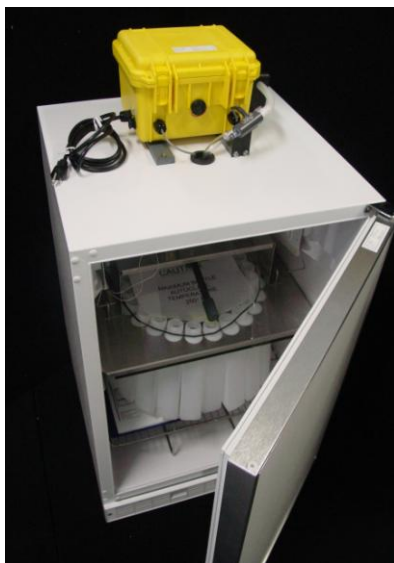

YB Multi-bottle Sampler on 6.1 cu. ft. White




YB Multi-bottle Sampler on 6.1 cu. ft. White

Refrigerator Part Numbers

Part Number	Description	Configurator Option
MS889404	Refrigerator, 6.1 cu. ft., White, 115V YB	2
MS889893	Refrigerator, 6.1 cu. ft., White, 230V YB	3
MS889892	Refrigerator, 6.1 cu. ft., Stainless, 115V YB	4
MS889894	Refrigerator, 6.1 cu. ft., Stainless, 230V YB	5
MS885005	Refrigerator, 6.1 cu. ft., White, 115V VSR	2
MS885003	Refrigerator, 6.1 cu. ft., White, 230V VSR	3
MS885002	Refrigerator, 6.1 cu. ft., Stainless, 115V VSR	4
MS885006	Refrigerator, 6.1 cu. ft., Stainless, 230V VSR	5
MS889013	Refrigerator, 6.1 cu. ft., White, 115V S5000	B
MS889049	Refrigerator, 6.1 cu. ft., Stainless, 115V S5000	C
MS889497	Refrigerator, 6.1 cu. ft., White, 115V S5200	B
MS889498	Refrigerator, 6.1 cu. ft., Stainless, 115V S5200	C

Specifications

Exterior Dimensions (approximate)W 23.875 in. (606.42 mm) × H 34.5 in. (876.30 mm) × D 24 in. (609.60 mm)
Weight (dry)..... 110 lbs (49.9 kg)
Interior Capacity6.1 cubic feet
Insulation.....1.25" Insulation - Rigid Foam R-4.0 to R-8.7 per inch
Door Liner.....Food-grade plastic
Exterior22-gauge steel with either a powder coated finish or made from 304 stainless steel. Thermal Resistance of R10.
Compressor Output1/10 HP, Bottom-mounted 440 BTU/HR; Mounting frame is G60 Galvanized
Refrigerant.....R134A
Refrigerant LinesCopper lines are coated with asphalt cork tape for protection against sulfide gas attack and corrosion.
Running Watts.....3.3 A for 110V 1.5A for 220V or 330-400 watts
Condenser.....Fan-cooled at approximately 110 cfm; protected powder-coated polyester
Defrost.....Cycle Automatic System
Ambient Temperature Range40–110° F (4.44–43.34° C)
Warranty.....One year from date of shipment.

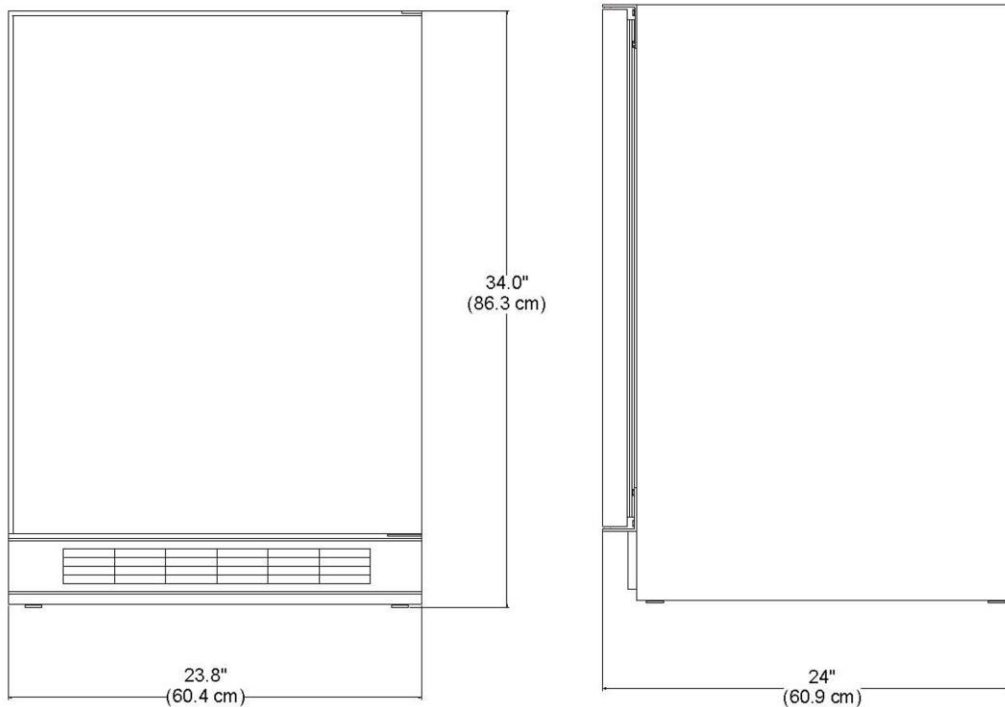

6.1 cu. ft. Refrigerator Reference Drawings

Headquarters and Sales:

Manning Environmental, Inc.
101 Bar T Dr.
Florence, Texas 76527

Phone: (800) 863-9337
Fax: (254) 793-9965
Email: sales@manning-enviro.com
Web: <http://www.manningenvironmental.com>

In the interest of improving and updating its equipment, Manning reserves the right to alter specifications to equipment at any time.